



DC BRUSHLESS FAN

<http://www.aurics.com.tw>

120x120x38mm SERIES

FEATURES

General Specification



- Insulation resistance : More than 10M at 250 VDC.
- Dielectric strength : 500 VDC. 60 sec or 600 VAC. 2 sec.
- Operating temperature : -10 ~70 (normal humidity)
- Storage temperature : -40 ~75 (normal humidity)

Material

- Housing : UL 94V-0 Glass filled polyester (P.B.T.)
- Fan blade : UL 94V-0 Glass filled polyester (P.B.T.)
- Lead wire : UL 1007, 22AWG (+ : Red, - : Black)
- Weight : 290 grams
- RoHS compliant part



DIMENSIONS & PERFORMANCE

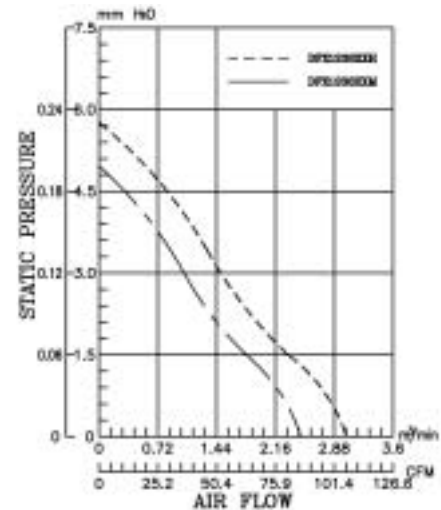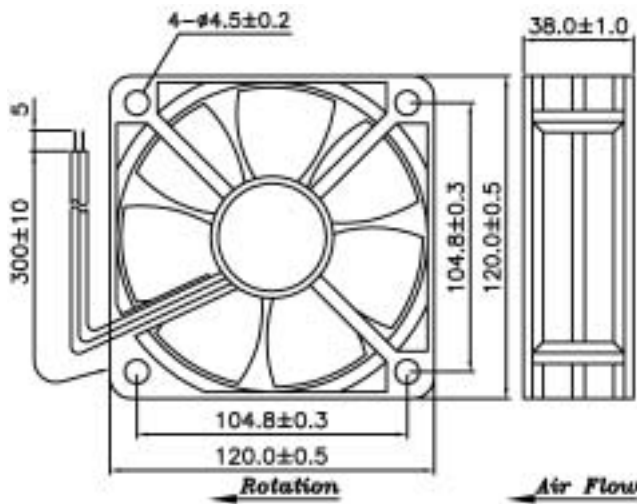

THE DETAIL SPECIFICATIONS ARE AS BELOWS :

Other technical characteristics are available on request.

MODEL NO.	BALL BEARING	RATED VOLTAGE (V)	INPUT CURRENT (A)	INPUT POEER (W)	SPEED (RPM)	MAX.AIR VOLUME (CFM)	MAX.STAT. PRESSURE (inch-H ₂ O)	NOISE LEVEL (dBA)
DFB123812H	BALL	12	0.52	6.24	2600	105.0	0.23	44.0
DFS123812H	SLEEVE							
DFB123812M	BALL		0.25	3.00	2000	79.6	0.20	33.0
DFS123812M	SLEEVE							
DFB123824H	BALL	24	0.36	8.64	2600	105.0	0.23	44.0
DFS123824H	SLEEVE							
DFB123824M	BALL		0.24	5.76	2000	79.6	0.20	33.0
DFS123824M	SLEEVE							

Note : The Specifications of this catalogue will be updated and it`s according to the approval sheet.