



DC BRUSHLESS FAN

<http://www.aurics.com.tw>

FEATURES

25x25x10mm SERIES

General Specification



- Insulation resistance:** More than 10M at 250 VDC.
- Dielectric strength:** 500 VDC. 60 sec or 600 VAC. 2 sec.
- Operating temperature:** -10 ~70 (normal humidity)
- Storage temperature:** -40 ~75 (normal humidity)



Material

- Housing:** UL 94V-0 Glass filled polyester (P.B.T.)
- Fan blade:** UL 94V-0 Glass filled polyester (P.B.T.)
- Lead wire:** UL 1571, 28AWG (+ : Red, - : Black)
- Weight:** 7 grams
- RoHS compliant part**

DIMENSIONS & PERFORMANCE

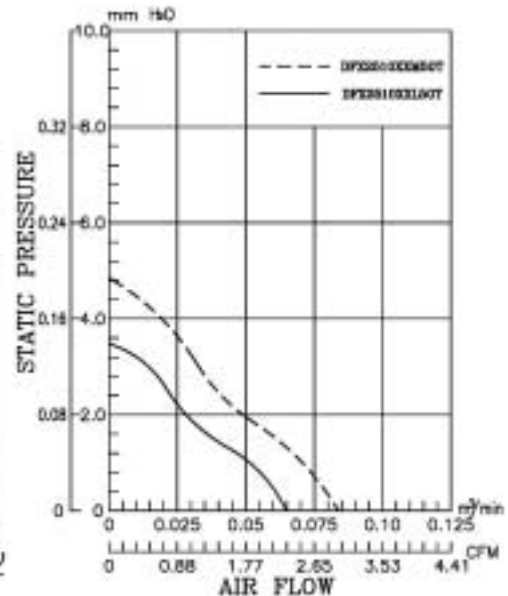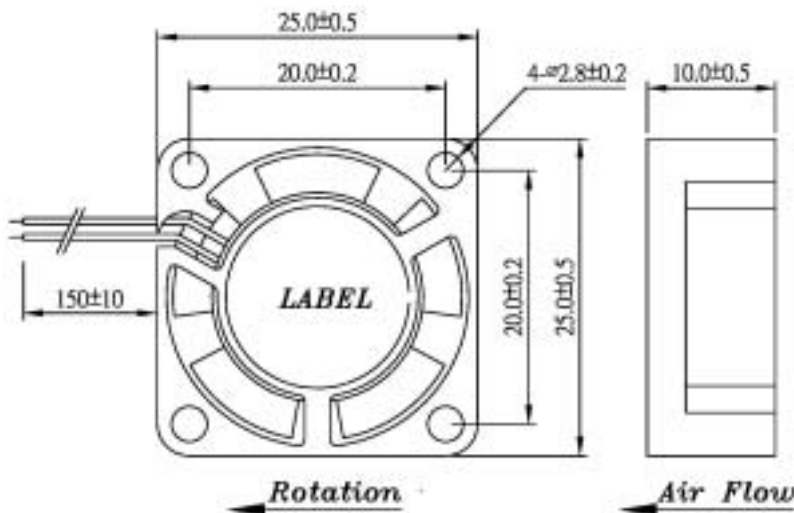

THE DETAIL SPECIFICATIONS ARE AS BELOWS :

Other technical characteristics are available on request.

MODEL NO.	BALL BEARING	RATED VOLTAGE (V)	INPUT CURRENT (A)	INPUT POEER (W)	SPEED (RPM)	MAX.AIR VOLUME (CFM)	MAX.STAT. PRESSURE (inch-H ₂ O)	NOISE LEVEL (dBA)
DFB251005M50T	2 BALL	5	0.14	0.7	10000	2.95	0.19	22.0
DFS251005M50T	SLEEVE							
DFB251005L50T	2 BALL	5	0.09	0.45	7500	2.25	0.14	19.0
DFS251005L50T	SLEEVE							
DFB251012M50T	2 BALL	12	0.08	0.96	10000	2.95	0.19	22.0
DFS251012M50T	SLEEVE							
DFB251012L50T	2 BALL	12	0.05	0.6	7500	2.25	0.14	19.0
DFS251012L50T	SLEEVE							

Note : The Specifications of this catalogue will be updated and it's according to the approval sheet.