



DC BRUSHLESS FAN

<http://www.aurics.com.tw>

FEATURES

35x35x7mm SERIES

General Specification



- Insulation resistance:** More than 10M at 250 VDC.
- Dielectric strength:** 500 VDC. 60 sec or 600 VAC. 2 sec.
- Operating temperature:** -10 ~70 (normal humidity)
- Storage temperature:** -40 ~75 (normal humidity)

Material

- Housing:** UL 94V-0 Glass filled polyester (P.B.T.)
- Fan blade:** UL 94V-0 Glass filled polyester (P.B.T.)
- Lead wire:** UL 1571, 28AWG (+ : Red, - : Black)
- Weight:** 8 grams
- RoHS compliant part**



DIMENSIONS & PERFORMANCE

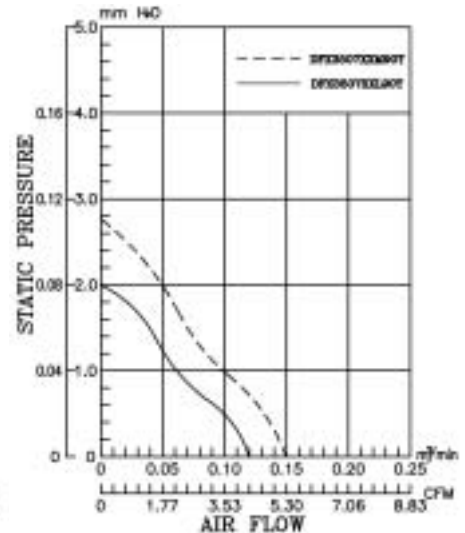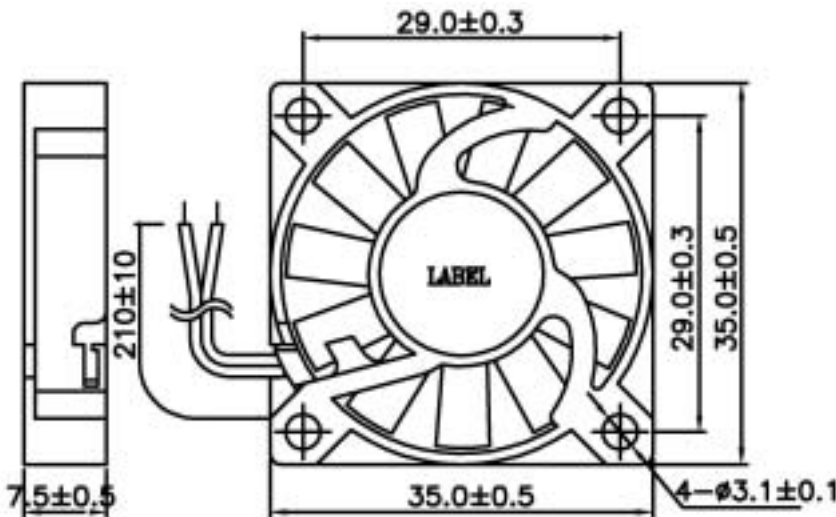

THE DETAIL SPECIFICATIONS ARE AS BELOWS :

Other technical characteristics are available on request.

MODEL NO.	BALL BEARING	RATED VOLTAGE (V)	INPUT CURRENT (A)	INPUT POEER (W)	SPEED (RPM)	MAX. AIR VOLUME (CFM)	MAX. STAT. PRESSURE (inch-H ₂ O)	NOISE LEVEL (dBA)
DFC350705M90T	BALL	5	0.20	1.0	7500	5.3	0.11	26.0
DFS350705M90T	SLEEVE							
DFC350705L90T	BALL	5	0.09	0.45	6000	4.3	0.08	23.0
DFS350705L90T	SLEEVE							
DFC350712M90T	BALL	12	0.10	1.2	7500	5.3	0.11	26.0
DFS350712M90T	SLEEVE							
DFC350712L90T	BALL	12	0.05	0.6	6000	4.3	0.08	23.0
DFS350712L90T	SLEEVE							

Note : The Specifications of this catalogue will be updated and it's according to the approval sheet.