



DC BRUSHLESS FAN

<http://www.aurics.com.tw>

FEATURES

40x40x7.5mm SERIES

General Specification



- Insulation resistance : More than 10M at 250 VDC.
- Dielectric strength : 500 VDC. 60 sec or 600 VAC. 2 sec.
- Operating temperature : -10 ~70 (normal humidity)
- Storage temperature : -40 ~75 (normal humidity)

Material

- Housing : UL 94V-0 Glass filled polyester (P.B.T.)
- Fan blade : UL 94V-0 Glass filled polyester (P.B.T.)
- Lead wire : UL 1571, 28AWG (+ : Red, - : Black)
- Weight : 12 grams
- RoHS compliant part



DIMENSIONS & PERFORMANCE

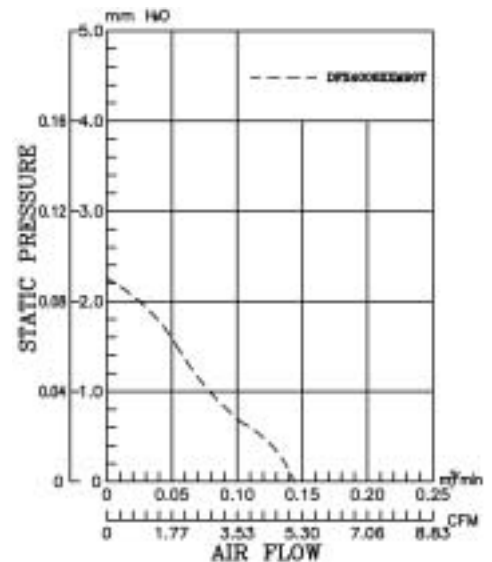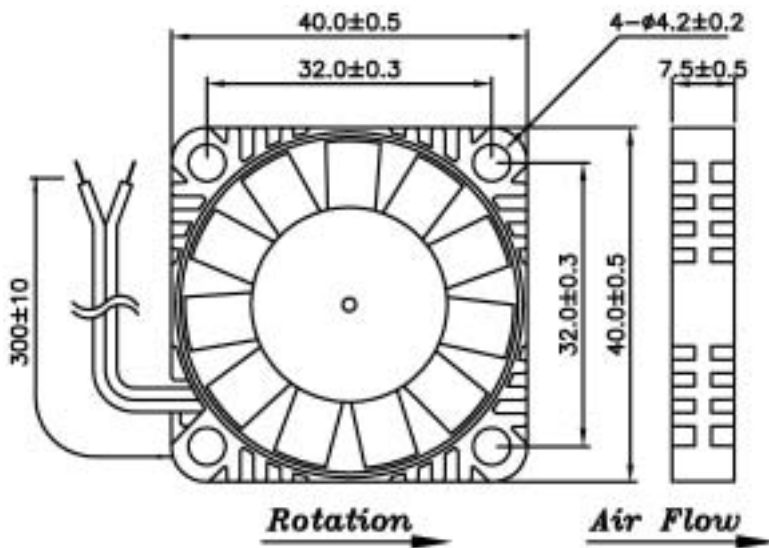

THE DETAIL SPECIFICATIONS ARE AS BELOWS :

Other technical characteristics are available on request.

MODEL NO.	BALL BEARING	RATED VOLTAGE (V)	INPUT CURRENT (A)	INPUT POEER (W)	SPEED (RPM)	MAX.AIR VOLUME (CFM)	MAX.STAT. PRESSURE (inch-H ₂ O)	NOISE LEVEL (dBA)
DFB400805M90T	BALL	5	0.18	0.9	6000	5.0	0.09	26.0
DFS400805M90T	SLEEVE							
DFB400812M90T	BALL	12	0.09	1.08	6000	5.0	0.09	26.0
DFS400812M90T	SLEEVE							

Note : The Specifications of this catalogue will be updated and it`s according to the approval sheet.