



# DC BRUSHLESS FAN

<http://www.aurics.com.tw>



## 40x40x10mm SERIES

### General Specification

- Insulation resistance: More than 10M at 250 VDC.
- Dielectric strength: 500 VDC. 60 sec or 600 VAC. 2 sec.
- Operating temperature: -10 ~70 (normal humidity)
- Storage temperature: -40 ~75 (normal humidity)

### Material

- Housing: UL 94V-0 Glass filled polyester (P.B.T.)
- Fan blade: UL 94V-0 Glass filled polyester (P.B.T.)
- Lead wire: UL 1007, 28AWG ( + : Red, - : Black)
- Weight: 17 grams
- RoHS compliant part

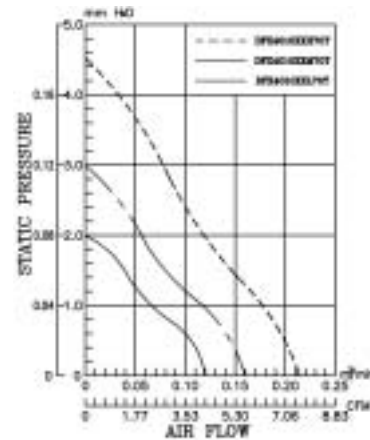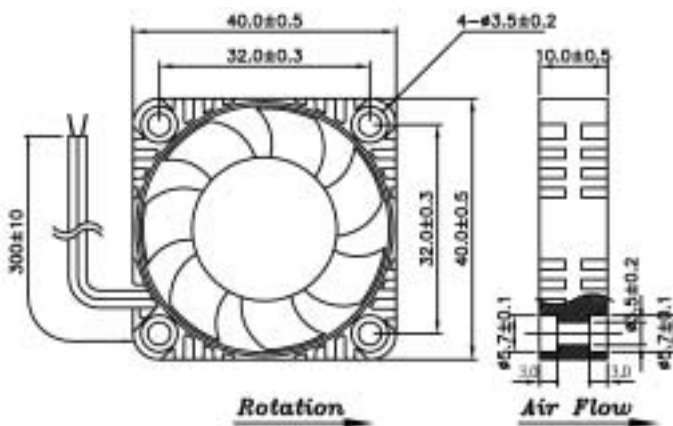

THE DETAIL SPECIFICATIONS ARE AS BELOWS :

MODEL NO.	BALL BEARING	RATED VOLTAGE (V)	INPUT CURRENT (A)	INPUT POEER (W)	SPEED (RPM)	MAX.AIR VOLUME (CFM)	MAX.STAT. PRESSURE (inch-H <sub>2</sub> O)	NOISE LEVEL (dBA)
DFB401005H70T	2 BALL	5	0.28	1.4	6500	7.3	0.18	26.0
DFC401005H70T	1 BALL							
DFS401005H70T	SLEEVE							
DFB401005M70T	2 BALL		0.1	0.5	5000	5.6	0.12	23.0
DFC401005M70T	1 BALL							
DFS401005M70T	SLEEVE							
DFB401005L70T	2 BALL		0.07	0.35	3800	4.3	0.08	20.0
DFC401005L70T	1 BALL							
DFS401005L70T	SLEEVE							
DFB401012H70T	2 BALL	12	0.07	0.84	6500	7.3	0.18	26.0
DFC401012H70T	1 BALL							
DFS401012H70T	SLEEVE							
DFB401012M70T	2 BALL		0.04	0.48	5000	5.6	0.12	23.0
DFC401012M70T	1 BALL							
DFS401012M70T	SLEEVE							
DFB401012L70T	2 BALL		0.03	0.36	3800	4.3	0.08	20.0
DFC401012L70T	1 BALL							
DFS401012L70T	SLEEVE							
DFB401024H70T	2 BALL	24	0.04	0.96	6500	7.3	0.18	26.0
DFC401024H70T	1 BALL							
DFS401024H70T	SLEEVE							

Note : The Specifications of this catalogue will be updated and it's according to the approval sheet.