



AC AXIAL FAN

<http://www.aurics.com.tw>

FEATURES

General Specification

- Insulation resistance : 10M at 500 VDC.
- Dielectric strength : One minute @ 1500VAC / 50-60Hz
- Operating temperature : -10 ~+70 (normal humidity)
- Storage temperature : -40 ~+80 (normal humidity)


Material

- Bearing System : Sleeve Bearing & Ball Bearing.
- Impeller : PBT +30% Fiber Glass. Black Color, UL94V-0.
- Housing : Aluminium Die-Cast.
- Lead Wire : UL1007 #22AWG
- Motor : Shaded Pole, Impedance Protected.
- Weight : 950 grams

172x150x51mm SERIES



PERFORMANCE & DIMENSIONS

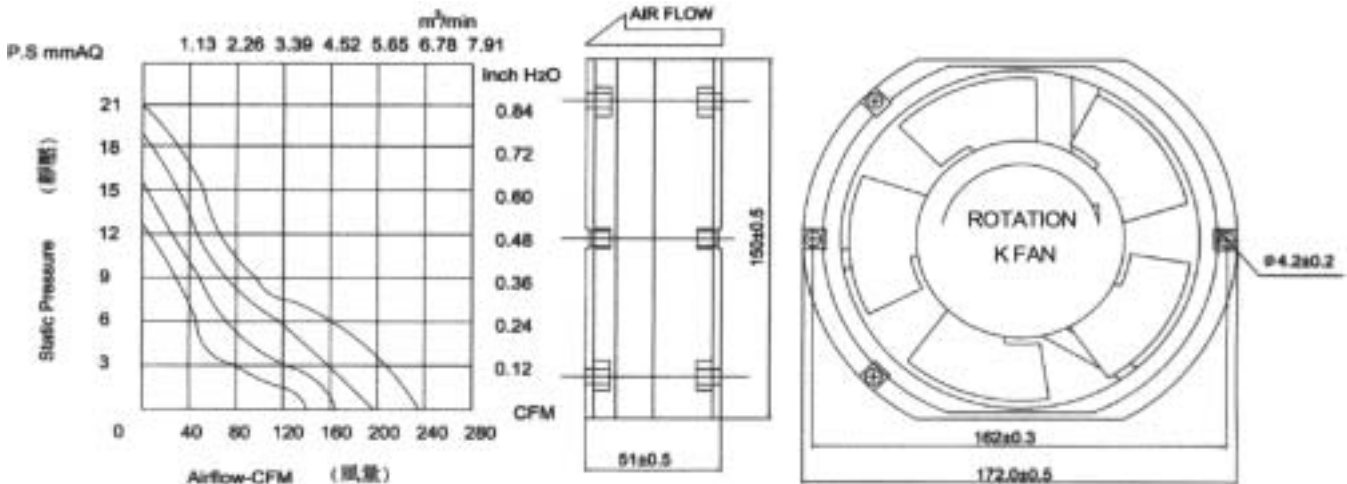

THE DETAIL SPECIFICATIONS ARE AS BELOWS :

Other technical characteristics are available on request.

MODEL NO.	BALL BEARING	VOLT (VAC)	FREQUENCY (Hz)	CURRENT (A)	POEER (W)	SPEED (RPM)	AIR VOLUME (CFM)	NOISE (Dba)
AFB1751H-1	BALL	110/120	50/60	0.54/0.44	40/38	2600/3000	200/220	50/55
AFS1751H-1	SLEEVE							
AFB1751M-1	BALL			0.50/0.40	31/30	2300/2600	175/195	40/45
AFS1751M-1	SLEEVE							
AFB1751L-1	BALL			0.40/0.31	24/23	1900/2200	155/175	33/38
AFS1751L-1	SLEEVE							
AFB1751H-2	BALL	220/240	50/60	0.30/0.23	40/38	2600/3000	200/220	50/55
AFS1751H-2	SLEEVE							
AFB1751M-2	BALL			0.26/0.21	31/30	2300/2600	175/195	40/45
AFS1751M-2	SLEEVE							
AFB1751L-2	BALL			0.19/0.17	24/23	1900/2200	155/175	33/38
AFS1751L-2	SLEEVE							

Note : The Specifications of this catalogue will be updated and it's according to the approval sheet.