



AC AXIAL FAN

<http://www.aurics.com.tw>

FEATURES


General Specification

- Insulation resistance : 10M at 500 VDC.
- Dielectric strength : One minute @ 1500VAC / 50-60Hz
- Operating temperature : -10 ~+70 (normal humidity)
- Storage temperature : -40 ~+80 (normal humidity)


80x80x25mm SERIES

Material

- Bearing System : Sleeve Bearing & Ball Bearing.
- Impeller : PBT +30% Fiber Glass. Black Color, UL94V-0.
- Housing : Aluminium Die-Cast.
- Lead Wire : UL1007 #22AWG
- Motor : Shaded Pole, Impedance Protected.
- Weight : 270 grams

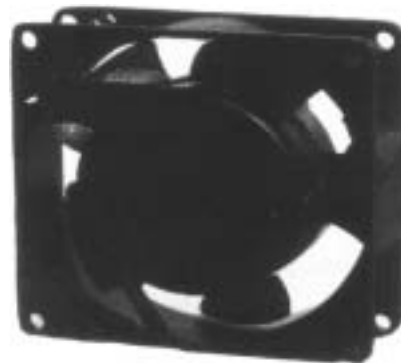

PERFORMANCE & DIMENSIONS

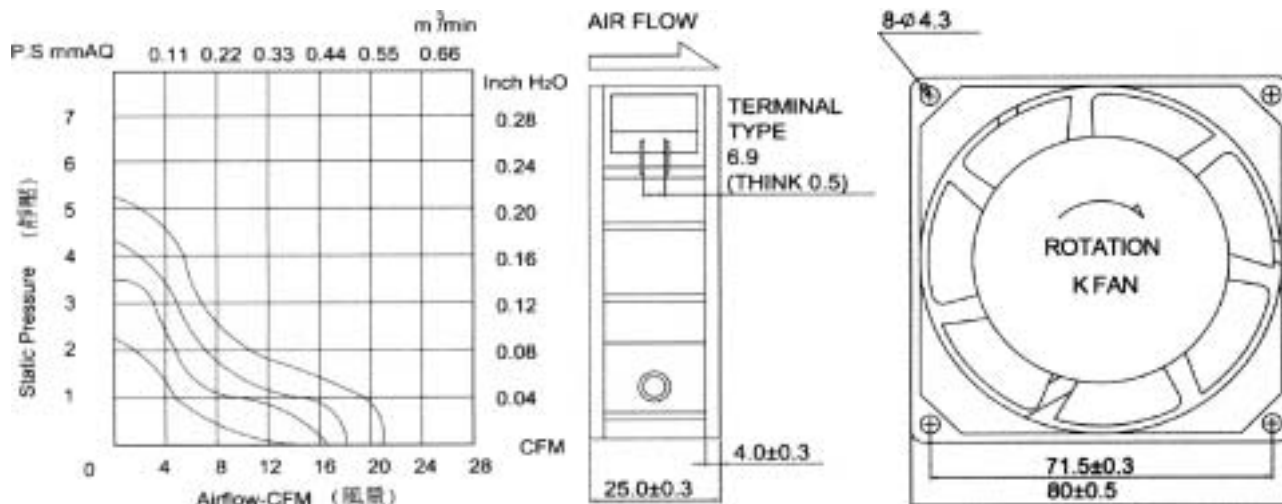

THE DETAIL SPECIFICATIONS ARE AS BELOWS :

Other technical characteristics are available on request.

MODEL NO.	BALL BEARING	VOLT (VAC)	FREQUENCY (Hz)	CURRENT (A)	POEER (W)	SPEED (RPM)	AIR VOLUME (CFM)	NOISE (Dba)
AFB8025H-1	BALL	110/120	50/60	0.14/0.12	14/13	2400/2800	27/30	30/35
AFS8025H-1	SLEEVE							
AFB8025M-1	BALL			0.12/0.10	11/10	2300/2600	22/26	24/27
AFS8025M-1	SLEEVE							
AFB8025L-1	BALL			0.10/0.08	7/6	1900/2200	18/20	21/23
AFS8025L-1	SLEEVE							
AFB8025H-2	BALL	220/240	50/60	0.10/0.08	14/13	2400/2800	27/30	30/35
AFS8025H-2	SLEEVE							
AFB8025M-2	BALL			0.08/0.06	11/10	2300/2600	22/26	24/27
AFS8025M-2	SLEEVE							
AFB8025L-2	BALL			0.06/0.04	7/6	1900/2200	18/20	21/23
AFS8025L-2	SLEEVE							

Note : The Specifications of this catalogue will be updated and it's according to the approval sheet.